

CONCEALED VERTICAL DROPBOLT



- A very neat dropbolt for gates which is enclosed within the box section frame of the gate.
Minimum box section 30 x 30mm (1¼" - 1½")
- If used on double gates, when the second gate is closed the dropbolt cannot be lifted
- Strong and durable, assembled using standard M10 studding



PRODUCT DETAILS

Product code:

Description:

05CDD
05CDS

For double gates
For single gate

Made from galvanized steel.

HOW TO OPERATE


With the dropbolt for double gates, simply close the first gate and drop the bolt into the locked position, the second gate can then be shut and locked meaning the dropbolt cannot be lifted.

For single gates the dropbolt will be used as a standard dropbolt with the neat concealed finish.



INSTALLATION

1. To install, cut the corner of your gate frame to fit in the two parts of the square box section provided.
2. The slotted section should be fitted where you want the drop bolt to be operated from.
The other section should be fitted at the bottom of the gate.
3. Use M10 studding to join the two round sections to make the bolt as long as you need it to be.

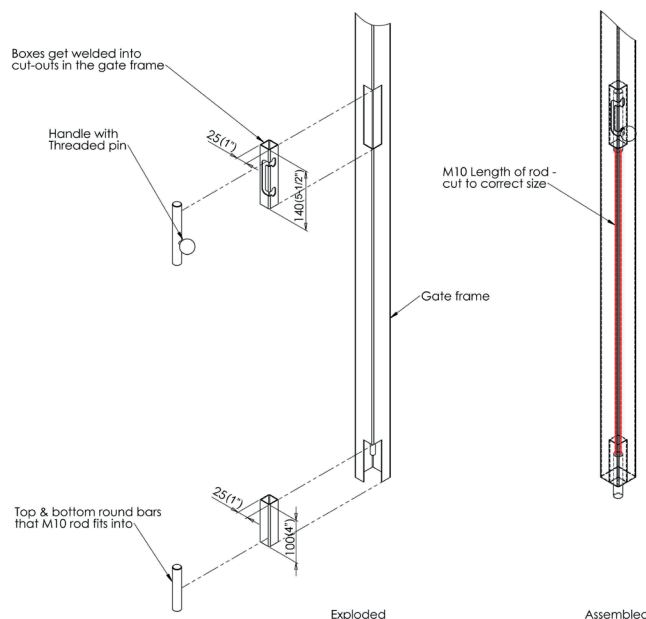

Whilst every effort has been made to ensure the accuracy of the information supplied. F.H. Brundle cannot be held responsible for any errors or omissions. This product must only be employed for its original intended use. Any other use is wrong and potentially dangerous. Installation must be carried out in full compliance with current regulations. F.H. Brundle cannot be held liable for any damages resulting from wrongful, erroneous or negligent use.



F.H. BRUNDLE
SERVING THE TRADE SINCE 1889

Tel. 01708 25 35 45

sales@brundle.com

www.fhbrundle.co.uk

Mar 2023