

DROP BOLT SURFACE FIX



- Robust bolt – Strongly constructed from galvanised and powder coated stainless steel
- Easy to fit – Needs just two 15mm holes in the gate and fixed with the expanding fasteners provided
- Adaptable – Fits left and right hand gates
- Innovative and secure – Once the drop bolt is lowered and rotated, closing the second gate prevents the drop bolt being unlocked



PRODUCT DETAILS

Product code: Description:


05LDBSS **Surface Fixed Locking Drop Bolt**
Stainless steel

Dropbolt diameter 19mm
Dropbolt movement 140mm



INSTALLATION

1. Drill 2 x 15mm holes, 20mm from the leading edge of the gate at 140mm centres, and fix the drop bolt guide to the gate with the 2 expanding fasteners supplied.
2. Fit the small location pin into the most suitable of the 3 location holes with the smaller screw provided.
3. Slide the drop bolt into the drop bolt guide, with the location pin facing into the back corner and then twist into position.
4. Fix the lift plate to the drop bolt in the correct position with the screw provided.

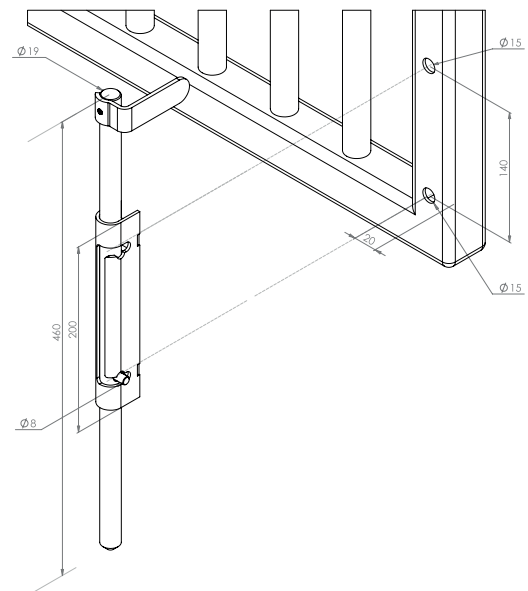

MAINTENANCE

Lubricate sliding parts when needed.

Whilst every effort has been made to ensure the accuracy of the information supplied, F.H. Brundle cannot be held responsible for any errors or omissions. This product must only be employed for its original intended use. Any other use is wrong and potentially dangerous. Installation must be carried out in full compliance with current regulations. F.H. Brundle cannot be held liable for any damages resulting from wrongful, erroneous or negligent use.



F.H. BRUNDLE
SERVING THE TRADE SINCE 1889

Tel. 01708 25 35 45

sales@brundle.com

www.fhbrundle.co.uk

Mar 2023