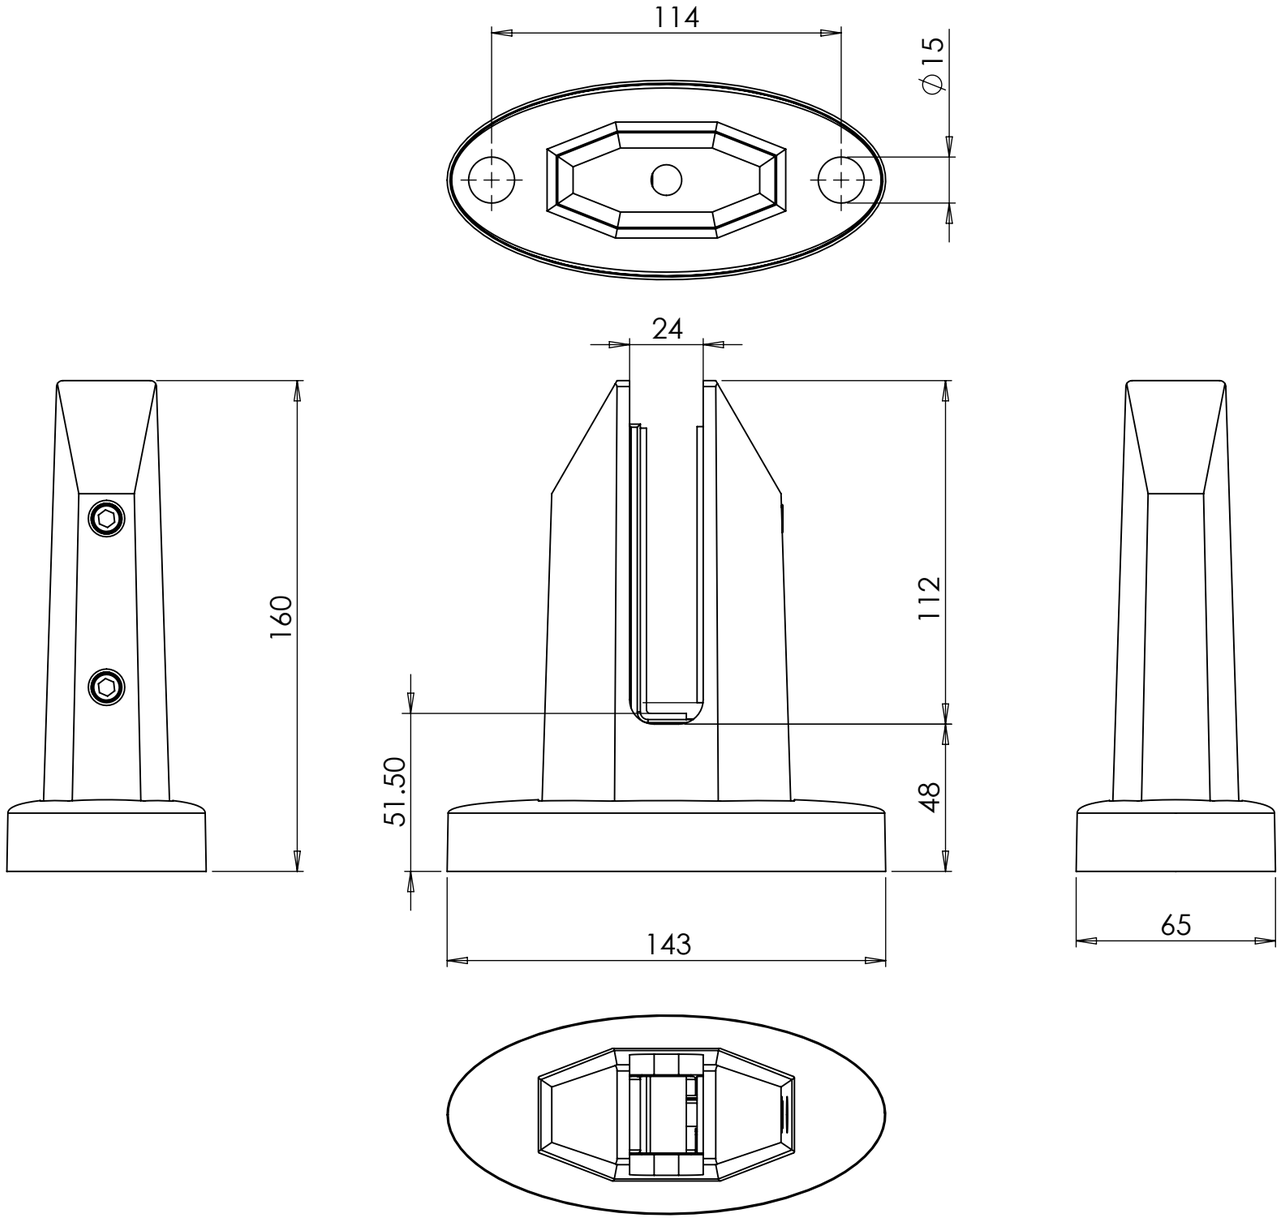

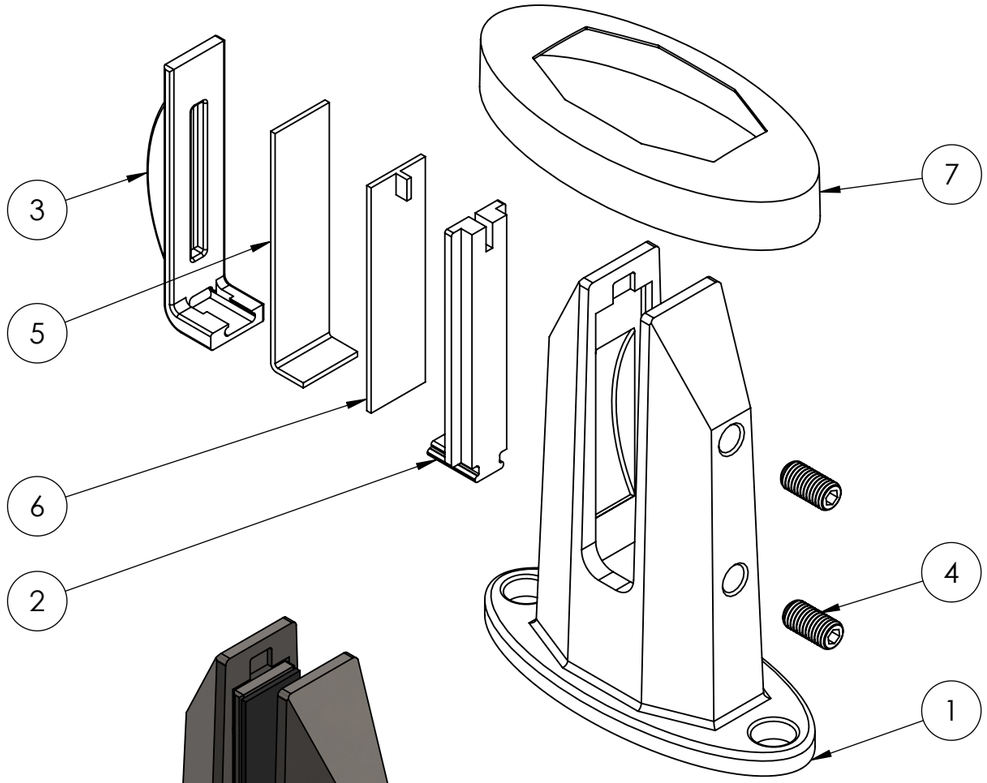

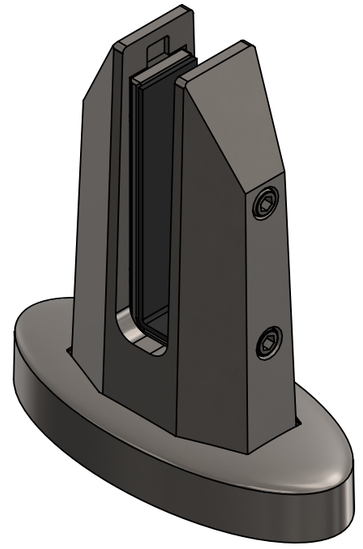

ITEM NO.	DESCRIPTION	QTY.
1	Tilt-Loc Glass Spigot Base Fix & Cover 12 - 17.52mm Glass Duplex 2205	1
2	Metal Insert 1	1
3	Metal Insert 2	1
4	M10 Hex Head	2
5	L Shaped Plastic Insert 2mm	1
6	Straight Plastic Insert 2mm	1
7	Base Fix Cover Plate	1

1) Tested To BS6180 - The Tilt-Loc™ system can easily be adjusted from one side, simply level by hand and tighten the grub screws once in position for a perfect finish in half the time when compared to standard non adjustable spigot. Maximum Tilt 30mm at the top when a 1000mm high glass panel is used.

2) This product is supplied with additional plastic inserts that can be used to secure different glass thicknesses

Pro-Railing
Tel: 0121 565 8282
Email: prorailing@brundle.com
Web: www.prorailing.co.uk

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN MILLIMETERS

	NAME	DATE	REVISION
DRAWN	GC	30/09/2016	J
CHECKED			

MATERIAL: 2205 Duplex
FINISH: Polished
GRIT SIZE: 320

NOTES: Customer Drawing Information

DESCRIPTION: Tilt-Loc Glass Spigot Base Fix & Cover 12 - 17.52mm Glass Duplex 2205

PART NO: 1822001

DWG NO: N/A

A3

SCALE:1:2 | DO NOT SCALE DRAWING | SHEET 1 OF 1