




ALUMINIUM GLASS BALUSTRADING CHANNEL



1) Insert bottom/ side plastic isolator

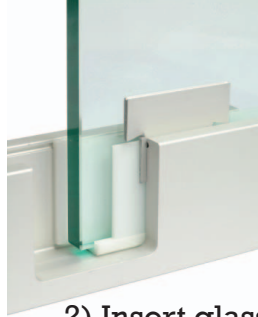

2) Insert glass and aluminium wedge - check alignment




3) Hammer in the aluminium wedges




4) Apply the cladding

BSI ABBREVIATED TEST REPORT FOR METHODS OF FIXING


	Glass	0.74kn	0.8kn	1.5kn	3.0kn
a	15mm	✓	✓	-	-
	19mm	-	-	✓	-
	25mm	-	-	✓	-
b	15mm	✓	✓	-	-
	19mm	-	-	✓	-
	25mm	-	-	✓	✓
c	15mm	✓	-	-	-
	19mm	-	✓	-	-
	25mm	-	-	✓	-
d	15mm	✓	✓	-	-
	19mm	-	-	✓	-
	25mm	-	-	-	✓
e	15mm	✓	-	-	-
	19mm	-	✓	-	-
f	15mm	✓	✓	-	-
	19mm	-	-	✓	-
	25mm	-	-	✓	✓
g	15mm	✓	✓	-	-
	19mm	-	✓	-	-
	25mm	-	-	✓	-

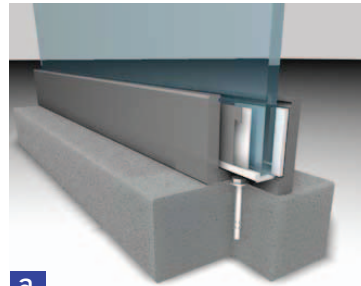


a

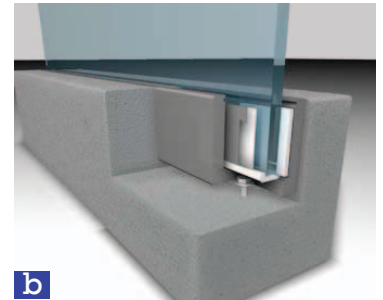


b

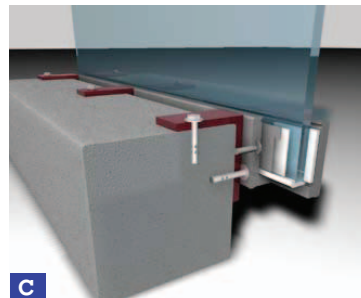


c

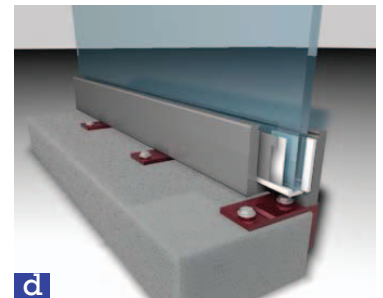


d

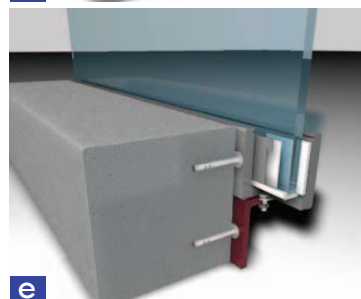

e

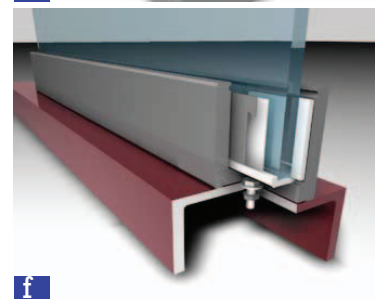

f

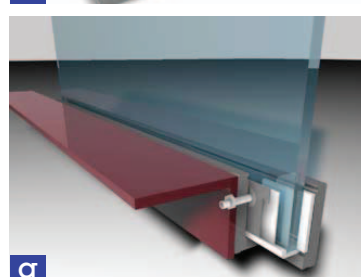

g

Full test results available on request.
Please phone 0121 327 8999

