

FAST TO INSTALL AND COST EFFECTIVE


Posiglaze is our innovative aluminium channel system that holds glass panels in place for use on balustrades and partitions.

PATENTED


FEATURES:

- Fast install
- Fully adjustable
- Light weight and extremely strong
- Suitable for domestic and commercial applications
- Fully anodised in a stainless steel effect

SIMPLE INSTALLATION





1. Fit the base channel (D1) to the substructure (details on suitable fixing can be found on our website).




2. Clip the glass slip clamps (D2) to the bottom edge of the glass panel (we supply different sized clamps for different glass thicknesses).

3. Position the glass in the channel.



4. Place the bolt screws in the pivot clamp (D3).


5. Using the adjustment bolts; loosening one side and tightening the other, will allow the alignment of the glass with the next panel and enable plumbing of the glass.



6. Attach the cover strip (D4) and bead gasket (D5).

FITTING SCENARIOS

Posi-Glaze can accommodate a range of different glass sizes; 12, 15, 17.5, 19 and 21.5mm in a number of different scenarios, some of which are shown below.

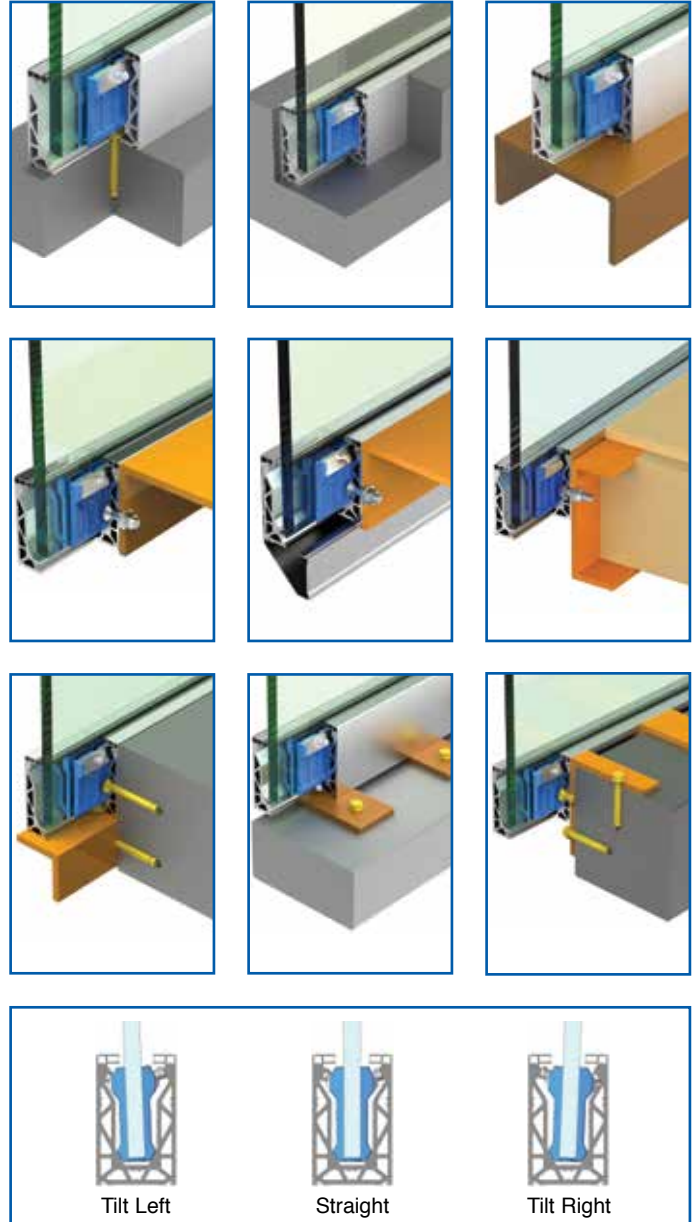

FAST AND EASY GLASS ADJUSTMENT WITH THE USE OF A SCREW

Posiglaze allows the installer to easily adjust the glass panels once in place. All the installer needs to do is simply adjust the bolt screw to align the glass. Fast and simple saving both time and money!



CHANNEL KITS INCLUDE:

- 1 x aluminium channel
- 2 x top cladding for base fix kit only
- 1 x top & 1 x side cladding for side fix kit only
- 2 x rubber gasket seals
- 4 x clamps per metre for relevant glass thickness
- Available in silver anodised brush or black finish

SATIN ANODISED BASE FIX CHANNEL KIT

Fixing Type	Glass Thickness mm	Height to Glass with Packer mm	3m Length Code	6m Length Code
Base	12.0	24.5	1805470BM12	18054706BM12
	13.5	22.5	1805470BM135	18054706BM135
	15.0	23.0	1805470BM15	18054706BM15
	17.5	22.5	1805470BM175	18054706BM175
	19.0	21.5	1805470BM19	18054706BM19
	21.5	22.5	1805470BM215	18054706BM215



SATIN ANODISED SIDE FIX CHANNEL KIT

Fixing Type	Glass Thickness mm	Length m	Height to Glass with Packer mm	Code
Side	12.0	3	24.5	1805470SM12
	13.5	3	22.5	1805470SM135
	15.0	3	23.0	1805470SM15
	17.5	3	22.5	1805470SM175
	19.0	3	21.5	1805470SM19
	21.5	3	22.5	1805470SM215



BLACK BASE FIX CHANNEL KIT

Fixing Type	Glass Thickness mm	Length m	Height to Glass with Packer mm	Code
Base	12.0	3	24.5	1805470BM12B
	13.5	3	22.5	1805470BM135B
	15.0	3	23.0	1805470BM15B
	17.5	3	22.5	1805470BM175B
	19.0	3	21.5	1805470BM19B
	21.5	3	22.5	1805470BM215B




ADDITIONAL COMPONENTS


90° CORNER



UNDERSIDE CLADDING & END CAP

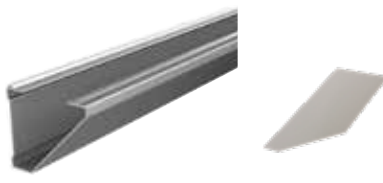

END CAP



Anodised Code	Black Code
1805470C	1805470CB

For use with base-fix channel.

Description	Length m	Code
Underside cladding	3	1805475U
End cap - left side	—	1805478L
End cap - right side	—	1805478R

Finish	Description	Code
Anodised	Without cladding	1805477
Anodised	One side cladding	1805477S
Anodised	Both sides cladding	1805477B
Black	Without cladding	1805477BB*

Sample cost refunded against your first order.

*Pre-drilled.

SAMPLE



Code
18POS11

CONCRETE BOLT
Self-tapping



Size mm	Pack Qty	Code
M10 x 100	1	5002HCS10100

For fixing to cracked and non-cracked concrete.

CLAMP SPANNER



To Suit	Code
M10	1805476

JOINING DOWELS



Code
1805479

HYCOTE
TOUCH UP PAINT



ml	Code
125	180547PB125

Whilst every effort has been made to ensure the accuracy of the information supplied. F.H.Brundle cannot be held responsible for any errors or omissions. This product must only be employed for its original intended use. Any other use is wrong and potentially dangerous. Installation must be carried out in full compliance with current regulations. F.H.Brundle cannot be held liable for any damages resulting from wrongful, erroneous or negligent use.

Nov 2021