

BK704AGS


Up to 400 kg



Ideal for fitting onto sliding gates

- Operate gates up to 400kg, all encoder controlled.
 - Can fit magnetic limit-switches.
 - Electronic board, with separate terminal blocks and display, to facilitate start-up and diagnosis phases. Storing for up to 250 different users.
 - Radio programming Rolling code and integrated Key Code (Twin).
 - The safety inputs can be configured to directly control the 8k2Q resistive sensitive-safety edges.
 - Management of the Rio series wireless security accessories using the dedicated plug-in accessory.
 - Testing of safety circuits for CAT 2 safety products – whether wireless or not.
 - Devices developed for connection to the cloud, via CAME Connect.
- Used to directly manage CAME key pads using the R800 accessory or connect CAME transponder selectors using the R700 accessory.

Dimensions (mm)

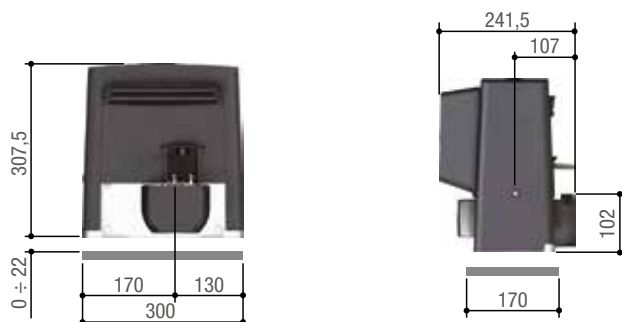

Operational limits

MODELS	801MS-0020
Max. length of leaf (m)	14
Max. weight of leaf (kg)	400

Technical characteristics

MODELS	801MS-0020
Protection rating (IP)	44
Power supply (V - 50/60 Hz)	230 AC
Power supply to motor (V)	230 AC 50/60 Hz
Absorption (A)	2,6
Power (W)	200
Maneuvering speed (m/min)	-
Duty/cycle (%)	30
Thrust (N)	300
Operating temperature (°C)	-20 ÷ +55
Motor's heat protection (°C)	150