


INSTALLATION INSTRUCTIONS

‘Soft & Quiet’

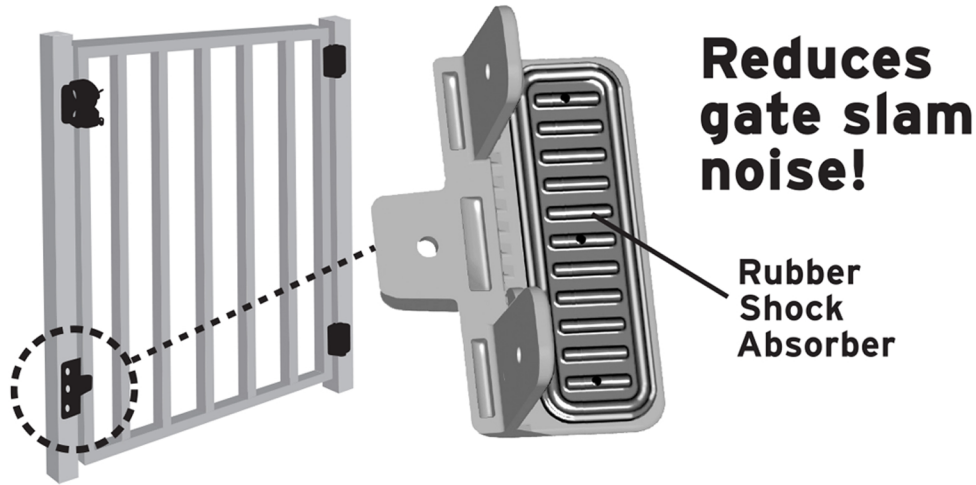

Congratulations on your purchase of D&D Technologies' TruClose® GateStop™.

We are confident that this product will provide you with a lifetime of quiet gate closure and reduce the damaging effect of gate slamming (see limited Lifetime Warranty details below).

Note: The GateStop should NOT be used on gates leading to swimming pools as it may provide a hand- or foothold for a child to use to gain access to the pool area.

Tools required: Electric or cordless drill with #2 Phillips-head driver, 5/32" (4mm) drill bit (use 10-gauge screws).

Installation procedures:

1. Determine the position of the GateStop™ on your gate. For optimal performance, mount the GateStop towards the bottom of the gate. For tall gates, two GateStops may be required. If two are used, mount one at the bottom and the other at the top of the gate. **Note:** Do not mount the GateStop to the fence post as it may present a tripping hazard.
2. Once the correct position has been determined, mark the all the holes for drilling.
3. Remove the GateStop™ and pre-drill using the 5/32" (4mm) drill bit.
4. Mount the GateStop™ with the 10-gauge screws using the use the #2 Phillips driver.
5. Your GateStop is now ready for use. Periodically retighten the screws to ensure a strong hold and reliable operation.

Whilst every effort has been made to ensure the accuracy of the information supplied. F.H. Brundle cannot be held responsible for any errors or omissions. This product must only be employed for its original intended use. Any other use is wrong and potentially dangerous. Installation must be carried out in full compliance with current regulations. F.H. Brundle cannot be held liable for any damages resulting from wrongful, erroneous or negligent use.