

- Stainless steel deadbolt which moves 30mm (1 1/8") with one turn of the key
- Deadbolt is adjustable on length for precise fitting on site
- Very easy to fit and comes in two sizes



PRODUCT DETAILS

Product code:	Description:
05SBD1601	Bolt-On Deadlock Flat Bar for 10-30mm Box Section
05SBD1602	Bolt-On Deadlock for 40-60mm Box Section
05SBD1601FBC	Bolt-On Deadlock Flat Bar for 10-30mm Box Section Fire Brigade Converted
05SBD1602FBC	Bolt-On Deadlock for 40-60mm Box Section Fire Brigade Converted


Marine grade: Salt spray tested for 1000 hours.
Deadbolt: Adjustable, moves 30mm (1 1/8").

Can be used for both left and right handed gates.



INSTALLATION

1. Drill 2 x 9mm (3/8") diameter holes at 92mm (3 5/8") centres for M8 fixing bolt.
2. Drill 18mm (3/4") clearance hole for latchbolt at 22mm (7/8") centres down from the top 9mm (3/8") hole.
3. Fix lock in place using stainless steel clamp plate, bolt support plate and 2 x stainless steel counter sunk fixing bolts supplied.
4. Drill clearance hole in gate post to receive deadbolt/latchbolt. Slot this hole vertically to allow for gate sag – fix strike plate and bend back so the latchbolt slides smoothly.
5. Ensure latchbolt moves freely without binding on gate or frame.
6. **MAINTENANCE:** Every two months, lubricate the latchbolt with light oil. Annually, dismantle lock and spray the mechanism inside with light oil.

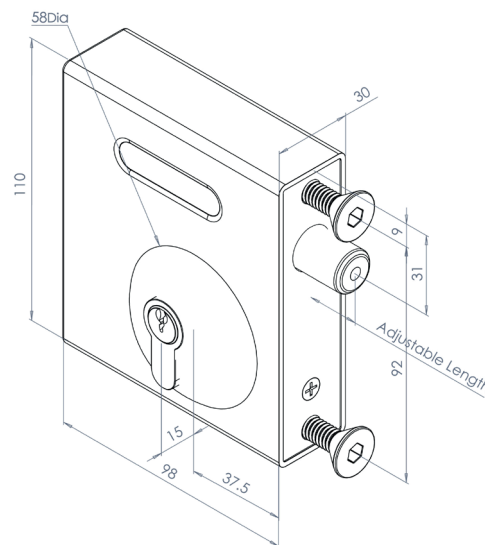

Whilst every effort has been made to ensure the accuracy of the information supplied. F.H. Brundle cannot be held responsible for any errors or omissions. This product must only be employed for its original intended use. Any other use is wrong and potentially dangerous. Installation must be carried out in full compliance with current regulations. F.H. Brundle cannot be held liable for any damages resulting from wrongful, erroneous or negligent use.